


ULTRA Pulpit Bow Roller (UPBR)

Suitable for all standard applications, without a bottom flange.

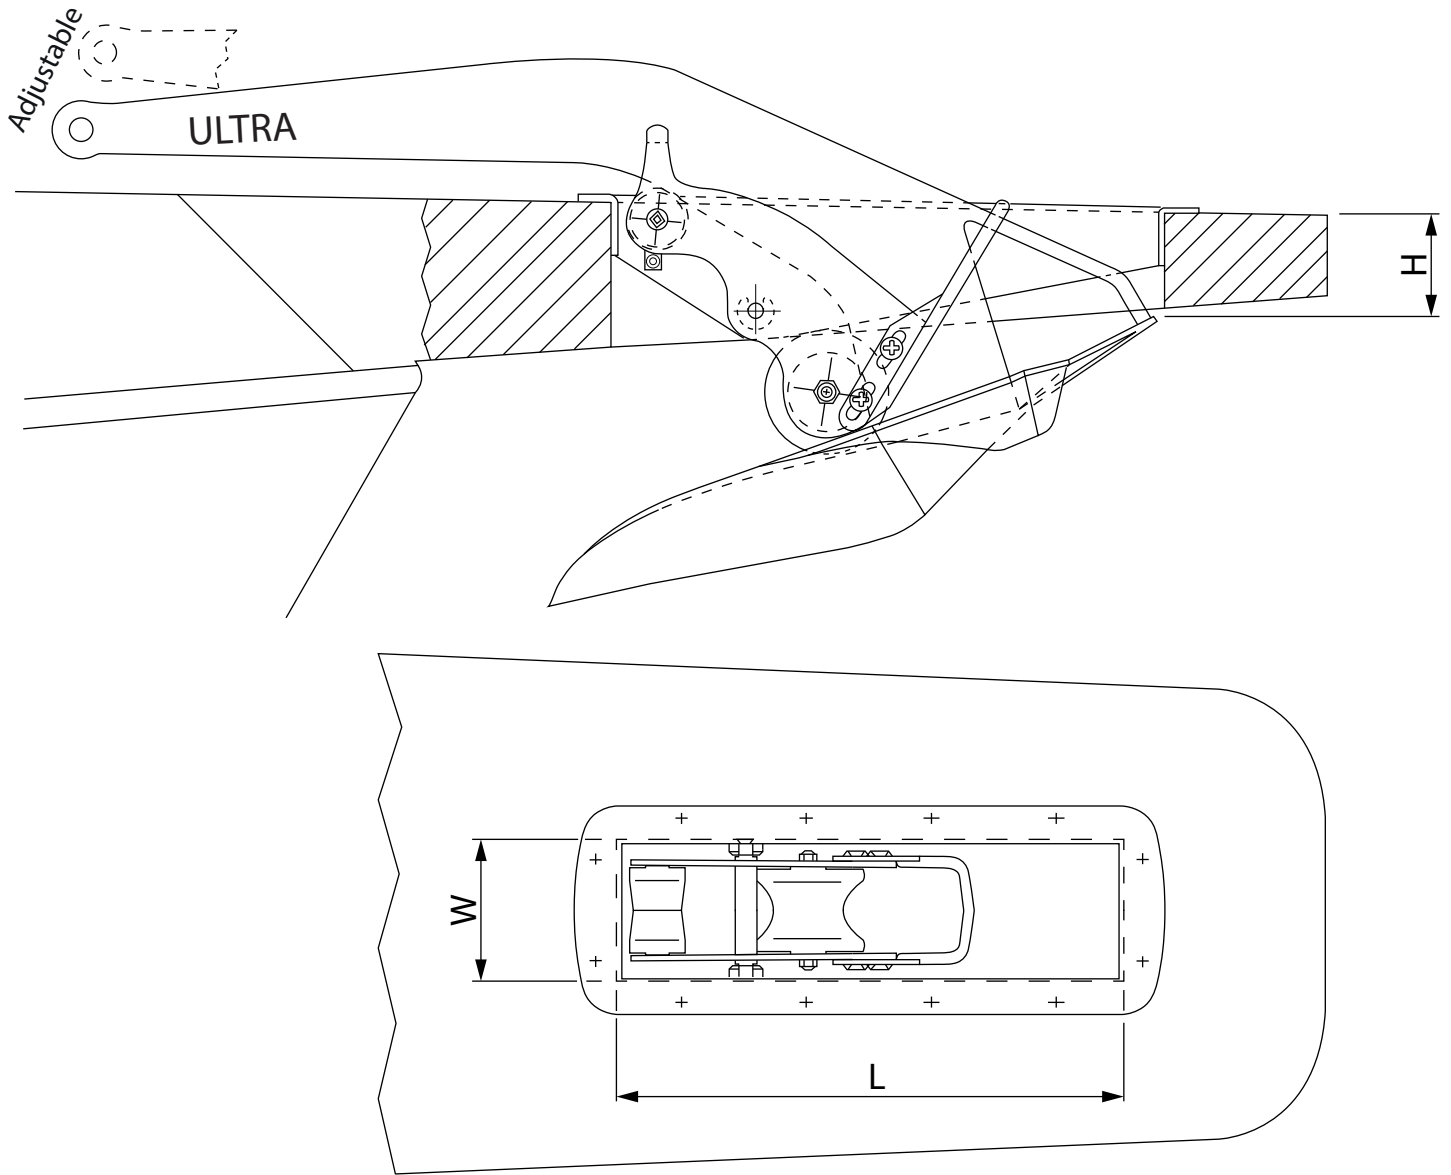

UA	5	8	12	16	21	27	35	45	60	80	100	130	160	200	250	300	360
~H	51.2	60	68.5	75.4	82.5	90	98	107	117	129	139	152	162	175	189	200	212
W _{BR}	76.5	90.5	102.4	111.9	123.8	133.7	146.9	158.7	173.4	193.7	207.3	224.9	243.8	261.1	283.8	300	316.6
L _{BR}	271.9	318.1	364	400.8	438.6	476.8	520.2	565.7	622.4	685	737.8	805.5	863	929.7	1001.7	1064	1128.4
W _{GAP}	79	93	105	115	127	137	150	162	177	198	211	229	248	266	289	305	322
L _{GAP}	274	321	367	404	442	480	524	570	626	689	742	810	868	935	1007	1070	1134

BR: Bow Roller

GAP: size of the opening needed to fit the bow roller

*All measurements in millimeters