


# ULTRA Sliding Bow Roller- Single (USBR-S)

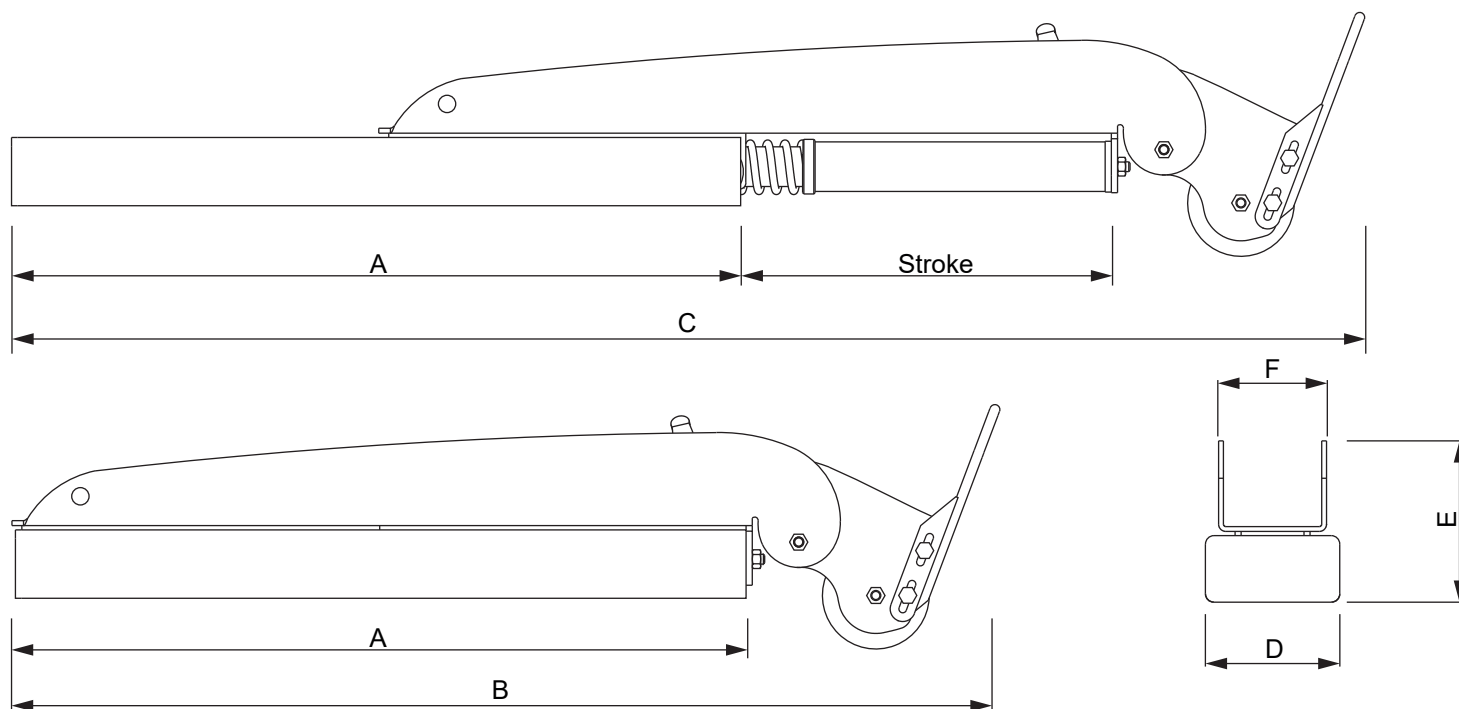

| Anchor<br>kg/lbs → | 5/11  | 8/18  | 12/26 | 16/35 | 21/46 | 27/60 | 35/77 | 45/100 |
|--------------------|-------|-------|-------|-------|-------|-------|-------|--------|
| A                  | 15.79 | 18.47 | 21.14 | 23.27 | 25.48 | 27.7  | 30.2  | 32.84  |
| B (*)              | 21.11 | 24.69 | 28.26 | 31.1  | 34.05 | 37.03 | 40.37 | 43.9   |
| C (*)              | 29.12 | 34.06 | 38.99 | 42.91 | 46.98 | 51.09 | 55.71 | 60.57  |
| Stroke             | 8.02  | 9.37  | 10.73 | 11.81 | 12.93 | 14.06 | 15.33 | 16.67  |
| D                  | 2.97  | 3.47  | 3.97  | 4.37  | 4.78  | 5.2   | 5.67  | 6.17   |
| E                  | 3.55  | 4.16  | 4.76  | 5.24  | 5.73  | 6.23  | 6.80  | 7.39   |
| F                  | 2.41  | 2.86  | 3.23  | 3.52  | 3.91  | 4.21  | 4.64  | 5      |

- (\*) "B" and "C" are the approximate dimensions given for the current drawing and may vary depending on the car movement.

- All measurements in inches.

We reserve the right to make changes to design and measurements.

For the latest version, please visit [www.ultraproductswest.com](http://www.ultraproductswest.com)